

# SO-239 angular connector

## TECHNICAL DATA

Frequency Range: ..... DC - 600 MHz  
Impedance: .....  $50 \pm 2 \Omega$   
Connectors: ..... UHF-Female, gold plated central pin  
Materials: ..... Chromed Brass, PTFE insulator, Stainless Steel  
Mounting Hole: .....  $\varnothing 16\text{mm}$ ,  $\varnothing 5/8\text{ in}$   
Operating Temperature: .....  $-40^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$




## Universal Mounting



HI-QUALITY ANTENNAS MADE IN ITALY

SIRIO's  
product  
assembly

Other's  
product  
assembly

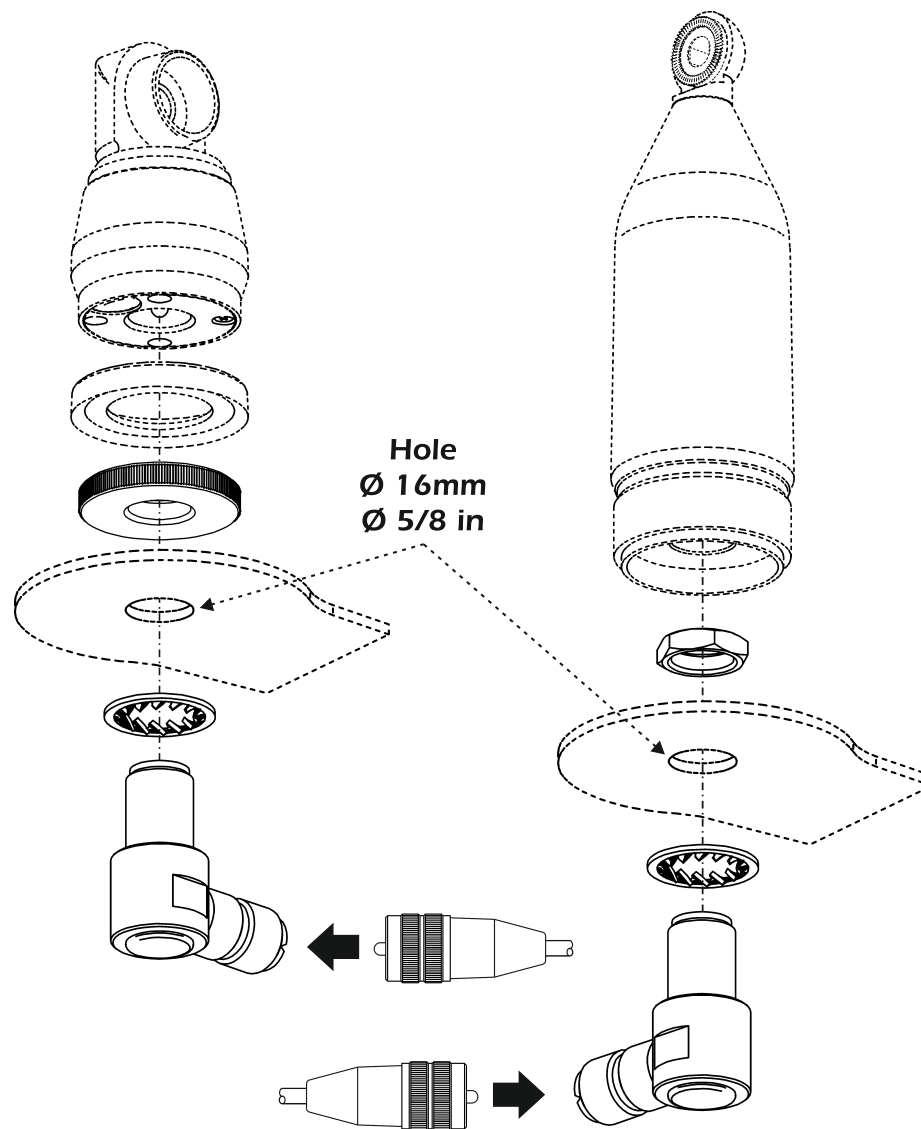

Technical Data are subjected to change - Printed in ITALY - Rev. 26/11/2019 - Cod. ID467